
RENISHAW
apply innovation™

# Accessories




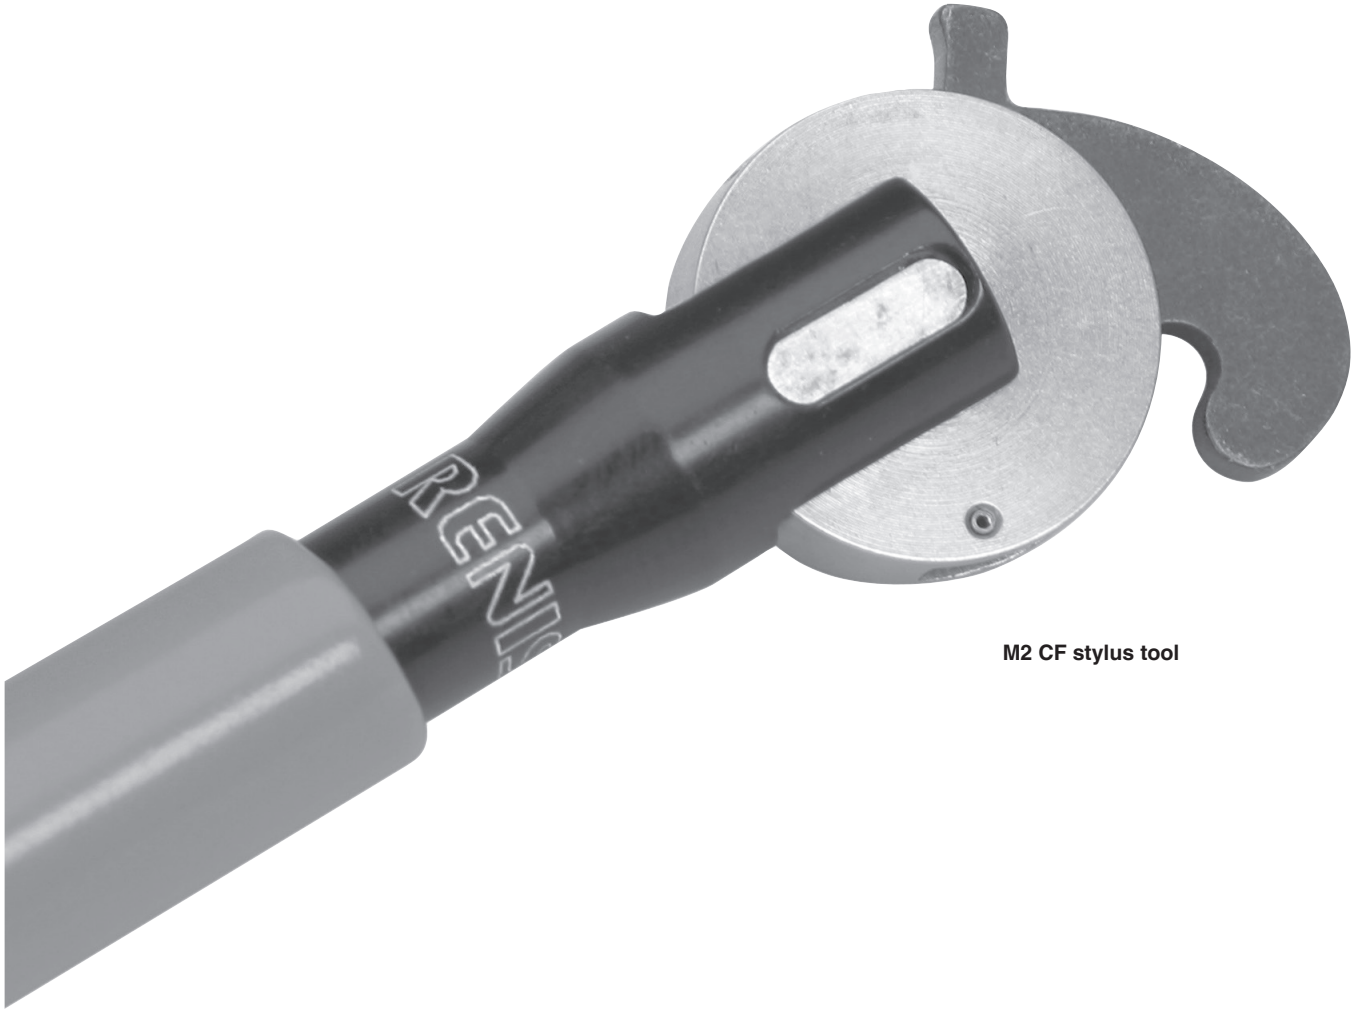

M2 CF stylus tool

## Stylus knuckles


| Part number | A-5000-7534* | A-5003-4697 | A-5000-9902 Rotary | A-5000-7616* | A-5003-4686 Rotary |
|---|---|---|---|---|---|
| Thread size | M2 | M2 | M2 | M3 | M3 |
| Effective length mm (in.) | 8.0 (0.32) | 13.5 (0.54) | 16.5 (0.65) | 12.0 (0.48) | 17.0 (0.67) |
| Centre offset mm (in.) | 4.5 (0.18) | N/A | N/A | 6.0 (0.24) | N/A |
| Mass grammes | 1.6 | 1.1 | 1.3 | 3.7 | 1.5 |

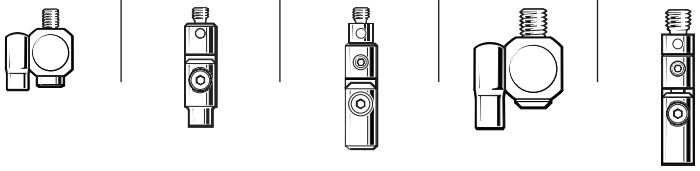

* M2 screw kit available to order A-5004-4447

* M3 screw kit available to order A-5004-7403


| Part number | A-5003-4689 Rotary | A-5003-5278** Rotary | A-5003-5279 Rotary |
|---|---|---|---|
| Thread size | M4 | M5 | M5 |
| Effective length mm (in.) | 33.0 (1.30) | 36.5 (1.44) | 46.5 (1.84) |
| Centre offset mm (in.) | N/A | N/A | N/A |
| Mass grammes | 9.8 | 16.5 | 64.9 |

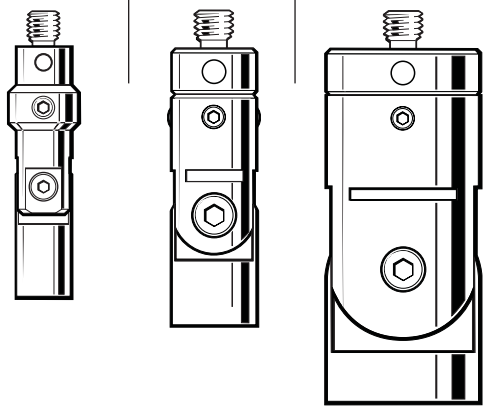


**Not for use with SP80

## Stylus centres


| Part number | A-5000-8395 4-way | A-5000-3627 5-way | A-5000-7610 5-way | A-5000-7792 5-way |
|---|---|---|---|---|
| Thread size | M2 | M2 | M3 | M4 |
| Effective length mm (in.) | 7.5 (0.30) | 7.5 (0.30) | 13.0 (0.52) | 18.0 (0.71) |
| Centre size mm (in.) | 7.5 (0.30) | 7.0 (0.28) | 10.0 (0.40) | 15.0 (0.60) |
| Mass grammes | 1.1 | 0.8 | 3.6 | 12.1 |

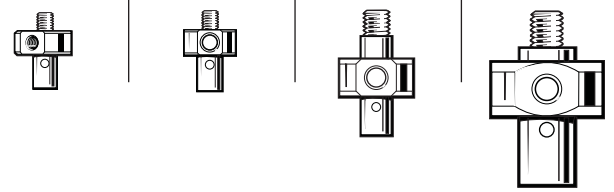




## Adaptors






| Part number | A-5004-7593<br>Stainless steel | A-5004-7592<br>Stainless steel | A-5004-7595<br>Stainless steel | A-5004-7597<br>Stainless steel | A-5004-7596<br>Stainless steel | A-5004-7613<br>Stainless steel | A-5003-0856<br>Stainless steel | A-5555-0227<br>Stainless steel |
|---|---|---|---|---|---|---|---|---|
| Male/female thread | M2/M3 | M3/M2 | M4/M2 | M4/M3 | M4/M3 | M5/M4 | M5/M4 | M5/M3 |
| Length mm (in.) | 7.0 (0.28) | 5.0 (0.20) | 5.0 (0.20) | 9.0 (0.36) | 20.0 (0.79) | 6.5 (0.26) | 9.0 (0.36) | 10.0 (0.40) |
| Mass grammes | 0.4 | 0.6 | 1.5 | 1.4 | 3.2 | 6.0 | 4.6 | 5.0 |

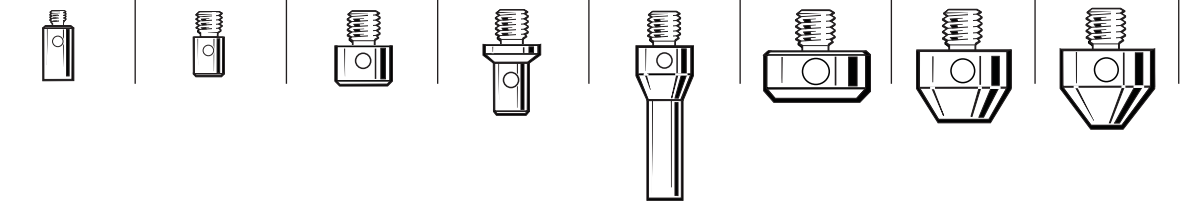





| Part number | A-5555-0226<br>Stainless steel | A-5000-7751<br>Ceramic | A-5004-7612<br>Stainless steel | A-5000-7752<br>Ceramic | A-5000-7753<br>Ceramic | A-2054-6350<br>Stainless steel |
|---|---|---|---|---|---|---|
| Male/female thread | M5/M2 | M4/M3 | TF6/M3 | M4/M3 | M4/M3 | M4/Ø4.5 |
| Length mm (in.) | 10.0 (0.40) | 50.0 (1.97) | 18.0 (0.71) | 75.0 (2.96) | 100.0 (3.94) | 10.0 (0.40) |
| Mass grammes | 5.0 | 4.4 | 1.9 | 5.2 | 6.3 | 5.0 |

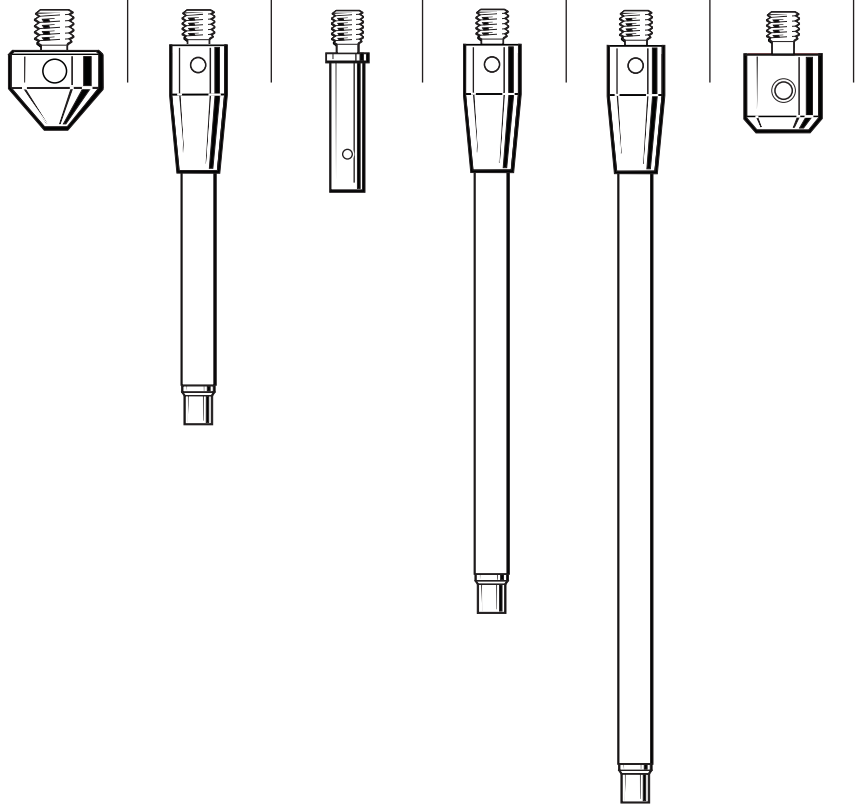

## Cubes and bolts

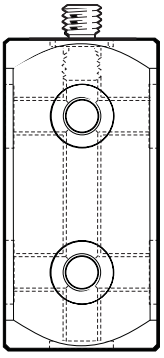
| Part number | A-5555-0189* Titanium | A-5555-0190* Titanium | A-5555-0194* Titanium | A-5003-5683* Titanium | A-5003-5684* Titanium |
|---|---|---|---|---|---|
| Thread size | M5 | M5 | M5 | M5 – M2 | M5 – M2 |
| Length mm (in.) | 15.0 (0.60) | 20.0 (0.79) | 20.0 (0.79) | 15.0 (0.60) | 20.0 (0.79) |
| Width mm (in.) | 15.0 (0.60) | 20.0 (0.79) | 40.0 (1.58) | 15.0 (0.60) | 20.0 (0.79) |
| Mass grammes | 12.85 | 32.55 | 63.50 | 13.75 | 35.18 |
| |  |  |  |  |  |

* Non-removable male thread

| Part number | A-5003-5679 Stainless steel | A-5003-5678 Stainless steel | A-5003-5677 Stainless steel | A-5003-5676 Stainless steel |
|---|---|---|---|---|
| Thread size | M5 – M2 | M5 – M2 | M5 | M5 |
| Length mm (in.) | 28.0 (1.11) | 33.0 (1.30) | 28.0 (1.11) | 33.0 (1.30) |
| Mass grammes | 6.7 | 7.1 | 6.0 | 6.4 |
| |  |  |  |  |

## Styli tools


**A-5004-7582**
For M2 and M3 threaded styli




**A-5004-7587**
For M4 threaded styli



**A-5004-7614**
For M5 threaded styli



**A-5003-2300**
For the M2 carbon fibre range of styli




This tool is to be used exclusively to tighten all M2 carbon fibre extensions. The tool has been designed to tighten the extensions to the correct torque value & will click when value has been reached. Do not overtighten past the click as this could potentially damage the component you are tightening.

These tools are designed to fit styli to Renishaw probes without causing internal damage

# M2 styli kits

## A-5000-0002 M2 stylus enhancement kit


RENISHAW
apply innovation™

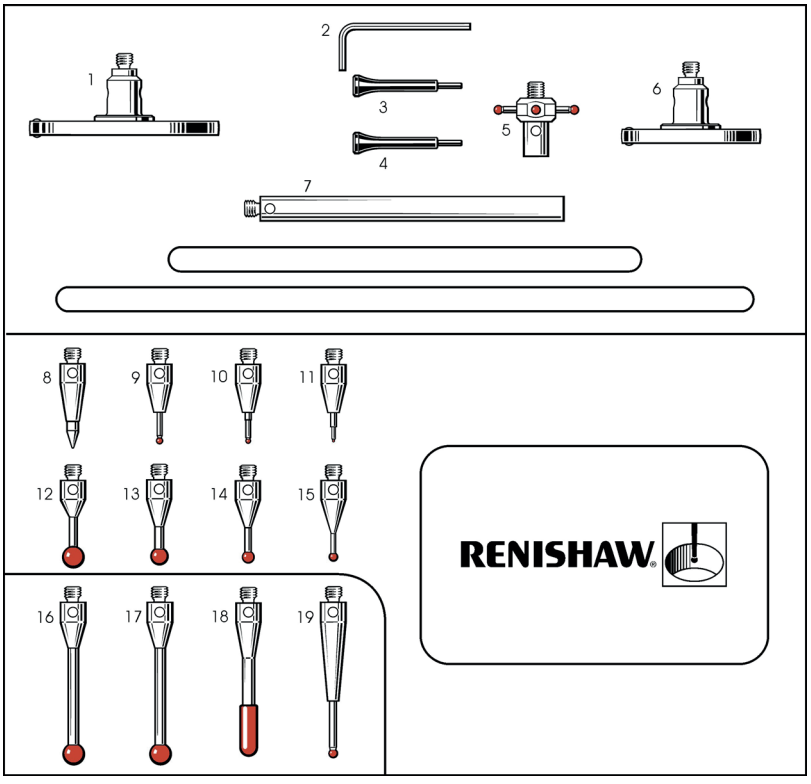


| Position | Part number | Description |
|---|---|---|
| 1 | A-5000-7810 | M2 DSC D25SLVS T1.5 L8.6 BR-Y2.5 |
| 2 | P-TL01-0150 | S3 HEX WRENCH 1.5 MM A/F |
| 3-4 | A-5004-7582 | M2-M3 STYLUS TOOL |
| 5 | A-5000-7811 | M2 STR D1R 4BALL L7.5T S10 |
| 6 | A-5000-7809 | M2 DSC D18SLVS T1.5 L8.6 BR-Y2.5 |
| 7 | A-5004-7611 | M2 EXT L40 d3SS |
| 8 | A-5000-7813 | M2 PNT D1.4TC 30deg L10 |
| 9 | A-5000-7801 | M2 STY D0.7R L10 EWL4 d0.5TC |
| 10 | A-5000-7805 | M2 STY D0.5R L10 EWL3 d0.4TC |
| 11 | A-5000-7800 | M2 STY D0.3R L10 EWL2 d0.2TC |
| 12 | A-5000-7803 | M2 STY D2.5R L10 EWL6.5 d1SS |
| 13 | A-5000-7807 | M2 STY D2R L10 EWL6 d1SS |
| 14 | A-5000-7802 | M2 STY D1.5R L10 EWL4.5 d0.7SS |
| 15 | A-5000-7806 | M2 STY D1R L10 EWL4.5 d0.7SS |
| 16-17 | A-5000-7804 | M2 STY D2.5R L20 EWL16.4 d1.4SS |
| 18 | A-5000-7812 | M2 SPH D2R L20 EWL7.2 SS |
| 19 | A-5000-7808 | M2 STY D1R L20 EWL7 d0.7TC |

## A-5003-2310 M2 high performance kit


RENISHAW
apply innovation™

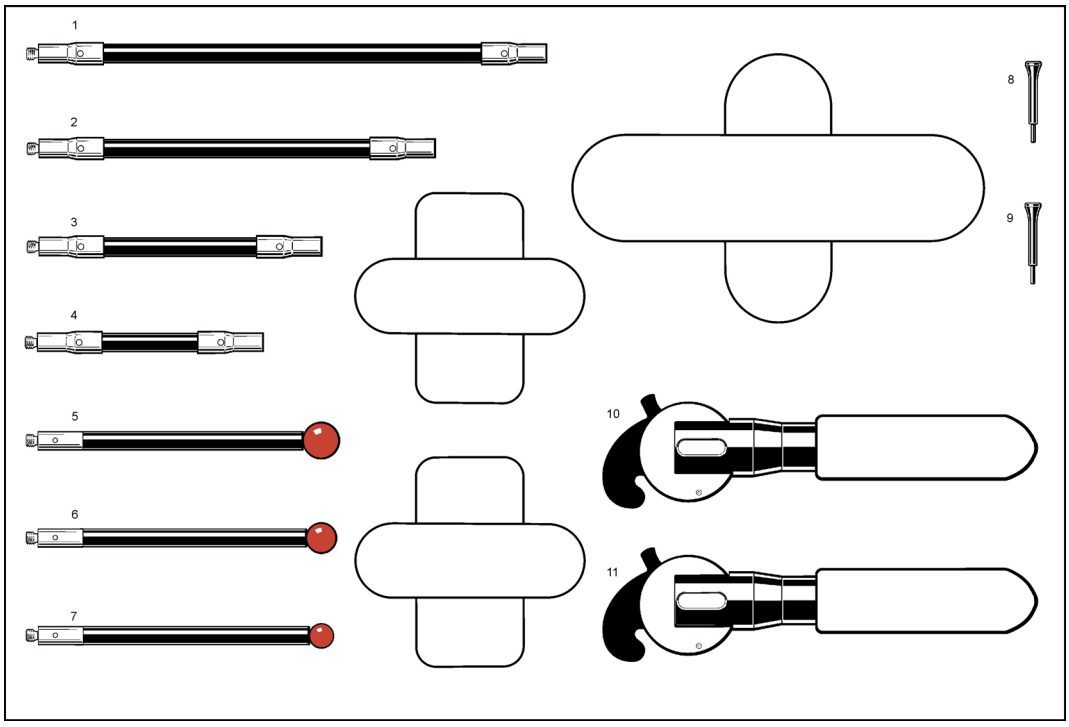


| Position | Part number | Description |
|---|---|---|
| 1 | A-5003-2283 | M2 EXT L90 d3CF |
| 2 | A-5003-2282 | M2 EXT L70 d3CF |
| 3 | A-5003-2281 | M2 EXT L50 d3CF |
| 4 | A-5003-2280 | M2 EXT L40 d3CF |
| 5 | A-5003-2287 | M2 STY D6R L50 EWL50 d3CF |
| 6 | A-5003-2286 | M2 STY D5R L50 EWL50 d3CF |
| 7 | A-5003-2285 | M2 STY D4R L50 EWL50 d3CF |
| 8-9 | A-5004-7582 | M2-M3 STYLUS TOOL |
| 10-11 | A-5003-2300 | M2 STYLUS TOOL CF RANGE |

## A-5000-0001 M2 comprehensive stylus kit

RENISHAW
apply innovation™

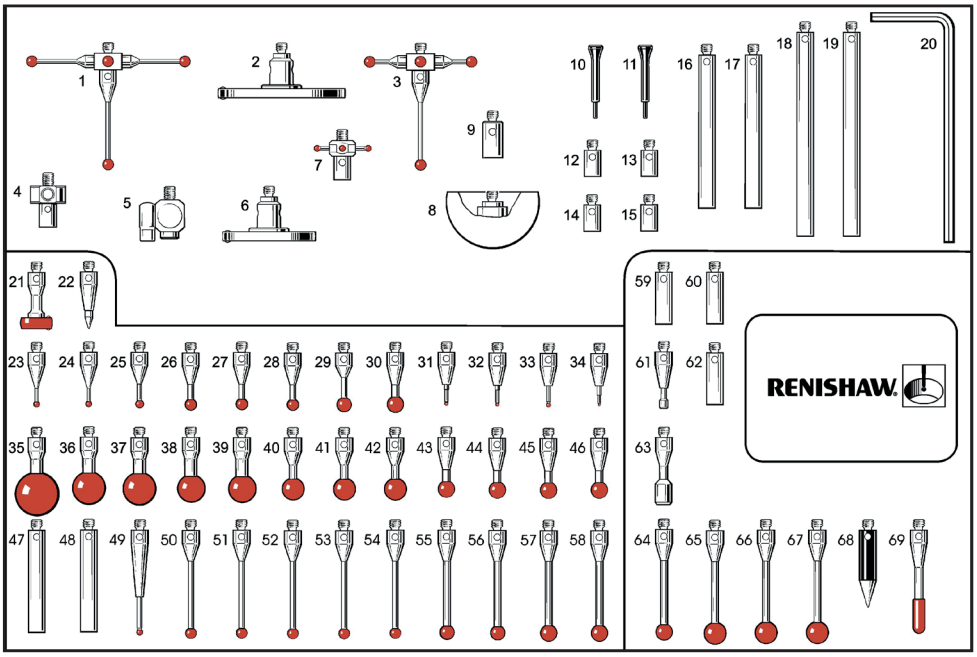



| Position | Part number | Description |
|---|---|---|
| 1 | A-5000-3626 | M2 STR D2R 5BALL L19.2 S30 |
| 2 | A-5000-7810 | M2 DSC D25SLVS T1.5 L8.6 BR-Y2.5 |
| 3 | A-5000-7629 | M2 STR D2R 5BALL L19.2 S18 |
| 4 | A-5000-3627 | M2 ACC CENTRE 5WAY |
| 5 | A-5000-7534 | M2 ACC KNUCKLE OFFSET |
| 6 | A-5000-7809 | M2 DSC D18SLVS T1.5 L8.6 BR-Y2.5 |
| 7 | A-5000-7811 | M2 STR D1 4BALL L7.5 S10 |
| 8 | A-5000-3614 | M2 HEM D18CE |
| 9 | A-5004-7593 | M2-M3 EXT L7SS |
| 10-11 | A-5004-7582 | M2-M3 STYLUS TOOL |
| 12-15 | A-5004-7610 | M2 EXT L5 d3SS |
| 16-17 | A-5004-7591 | M2 EXT L30 d3SS |
| 18-19 | A-5004-7611 | M2 EXT L40 d3SS |
| 20 | P-TL01-0150 | S3 HEX WRENCH 1.5 MM A/F |
| 21 | A-5000-3611 | M2 DSC D6R T1.2 L10 BR-Y2 |
| 22 | A-5000-7813 | M2 PNT D1.4TC 30deg L10 |
| 23-24 | A-5000-7806 | M2 STY D1R L10 EWL4.5 d0.7SS |
| 25 | A-5000-7802 | M2 STY D1.5R L10 EWL4.5 d0.7SS |
| 26-28 | A-5000-7807 | M2 STY D2R L10 EWL6 d1SS |
| 29 | A-5000-7803 | M2 STY D2.5R L10 EWL6 d1SS |
| 30 | A-5000-3604 | M2 STY D3R L10 EWL7.5 d1.5SS |
| 31-32 | A-5000-7805 | M2 STY D0.5R L10 EWL3 d0.4TC |
| 33 | A-5000-7801 | M2 STY D0.7R L10 EWL4 d0.5TC |
| 34 | A-5000-7800 | M2 STY D0.3R L10 EWL2 d0.2TC |
| 35 | A-5000-4158 | M2 STY D8R L11 EWL11 d2.5SS |
| 36-37 | A-5000-4156 | M2 STY D6R L10 EWL10 d2.5SS |
| 38-39 | A-5000-4155 | M2 STY D5R L10 EWL10 d2.5SS |
| 40-42 | A-5000-4154 | M2 STY D4R L10 EWL10 d1.5SS |
| 43-46 | A-5000-3604 | M2 STY D3R L10 EWL7 d1.5SS |
| 47-48 | A-5004-7586 | M2 EXT L20 d3SS |
| 49 | A-5000-7808 | M2 STY D1R L20 EWL7 d0.7TC |
| 50-54 | A-5000-3603 | M2 STY D2R L20 EWL14 d1.4SS |
| 55-56 | A-5000-7804 | M2 STY D2.5R L20 EWL16.4 d1.4SS |
| 57-58 | A-5000-4160 | M2 STY D3R L20 EWL17 d1.5SS |
| 59-60 | A-5004-7585 | M2 EXT L10 d3SS |
| 61 | A-5004-7589 | M2 CYL D1.5SLVS L11 EWL1.25 |
| 62 | A-50047585 | M2 EXT L10 d3SS |
| 63 | A-5004-7590 | M2 CYL D3SLVS L13 EWL3.8 |
| 64 | A-5000-4160 | M2 STY D3R L20 EWL17 d1.5SS |
| 65-67 | A-5000-4161 | M2 STY D4R L20 EWL20 d1.5SS |
| 68 | A-5004-7588 | M2 PNT D3SLVS 30deg L15 |
| 69 | A-5000-7812 | M2 SPH D2R L20 EWL7.2 SS |

## M2 styli kits

### A-5004-5131 M2 stylus starter kit

RENISHAW apply innovation™

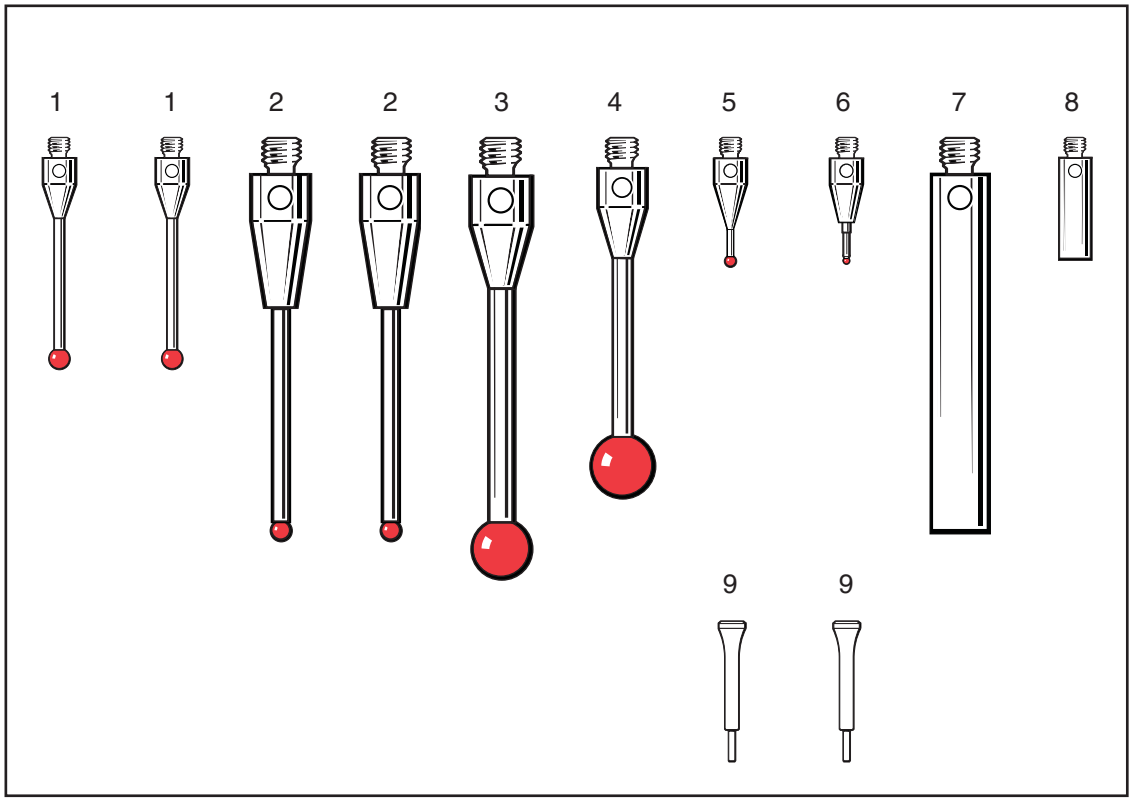



| Position | Part number | Description |
|---|---|---|
| 1 | A-5003-3603 | M2 STY D2R L20 EWL14 d1.4SS |
| 2 | A-5003-0033 | M2 STY D1R L20 EWL12.5 d0.8TC |
| 3 | A-5000-4160 | M2 STY D3R L20 EWL17 d1.5SS |
| 4 | A-5000-4161 | M2 STY D4R L20 EWL20 d1.5SS |
| 5 | A-5000-7806 | M2 STY D1R L10 EWL4.5 d0.7SS |
| 6 | A-5000-7805 | M2 STY D0.5R L10 EWL3 d0.4TC |
| 7 | A-5004-7586 | M2 EXT L20 d3SS |
| 8 | A-5004-7585 | M2 EXT L10 d3SS |
| 9 | A-5004-7582 | M2-M3 STYLUS TOOL |

# M3 styli kits

## A-5004-6880 M3 stylus starter kit

RENISHAW
apply innovation™

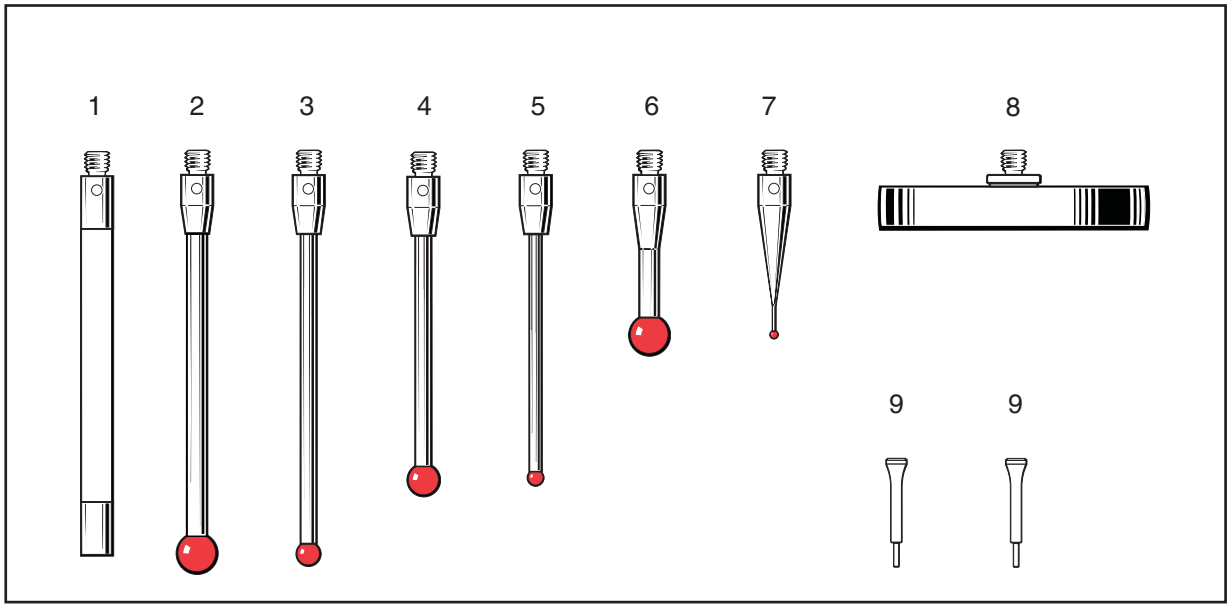



| Position | Part number | Description |
|---|---|---|
| 1 | A-5003-0075 | M3 EXT L50 d4CE |
| 2 | A-5003-0069 | M3 STY D5R L50 EWL50 d2.5CE |
| 3 | A-5003-0059 | M3 STY D3R L50 EWL43.7 d2TC |
| 4 | A-5003-0060 | M3 STY D4R L40 EWL36 d2TC |
| 5 | A-5003-0053 | M3 STY D2R L40 EWL32.5 d1.5TC |

| Position | Part number | Description |
|---|---|---|
| 6 | A-5000-7630 | M3 STY D5R L21 EWL21 d2.5SS |
| 7 | A-5000-3551 | M3 STY D1R L21 EWL4 d0.7SS |
| 8 | A-5000-7612 | M3 DSC D35SLVS T5 L3.5 BR-N |
| 9 | A-5004-7582 | M2-M3 STYLUS TOOL |



## A-5003-6151 M3 stylus kit for SP25M/SM25-1/SH25-1

RENISHAW
apply innovation™

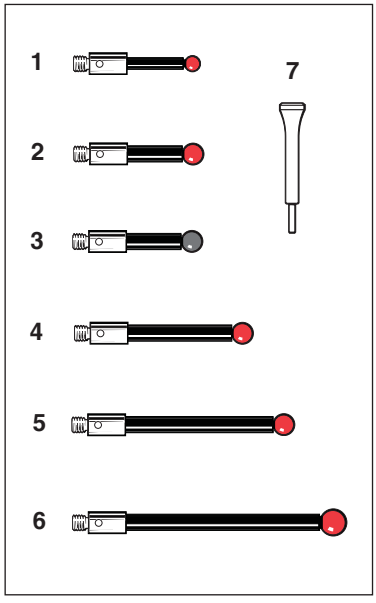



| Position | Part number | Description |
|---|---|---|
| 1 | A-5003-5970 | M3 STY D3R L21 EWL13.5 d2CF |
| 2 | A-5003-5971 | M3 STY D4R L21 EWL13.5 d3CF |
| 3 | A-5003-5977 | M3 STY D4SN L21 EWL13.5 d3CF |
| 4 | A-5003-5972 | M3 STY D4R L31 EWL23.5 d3CF |
| 5 | A-5003-5973 | M3 STY D4R L40 EWL32.5 d3CF |
| 6 | A-5003-5974 | M3 STY D5R L50 EWL42.5 d3CF |
| 7 | A-5004-7582 | M2-M3 STYLUS TOOL |

## M3 styli kits

### A-5003-6152 M3 stylus kit for SP25M/SM25-2/SH25-2

RENISHAW apply innovation™

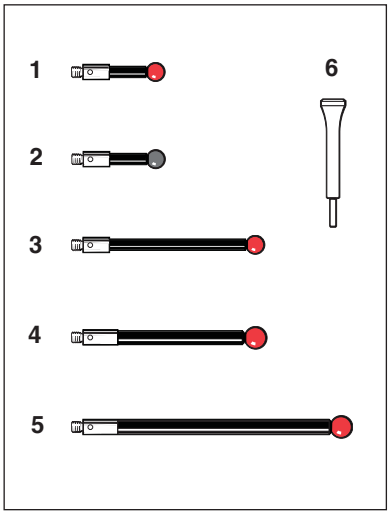



| Position | Part number | Description |
|---|---|---|
| 1 | A-5003-5975 | M3 STY D5R L21 EWL13.5 d3CF |
| 2 | A-5003-5978 | M3 STY D5SN L21 EWL13.5 d3CF |
| 3 | A-5003-5974 | M3 STY D5R L50 EWL42.5 d3CF |
| 4 | A-5003-5976 | M3 STY D6R L50 EWL50 d4CF |
| 5 | A-5003-4860 | M3 STY D6R L75 EWL75 d4CF |
| 6 | A-5004-7582 | M2-M3 STYLUS TOOL |

www.renishaw.com

### A-5003-6153 M3 stylus kit for SP25M/SM25-3/SH25-3

RENISHAW apply innovation™

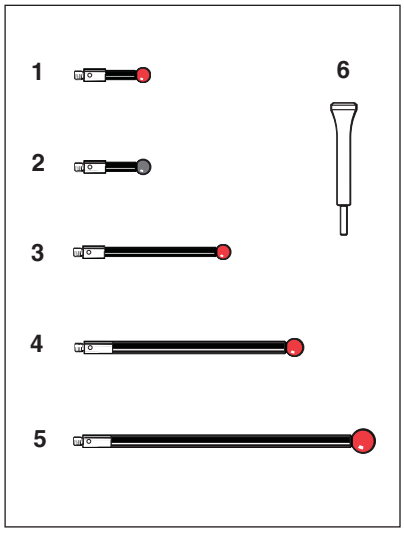



| Position | Part number | Description |
|---|---|---|
| 1 | A-5003-5975 | M3 STY D5R L21 EWL13.5 d3CF |
| 2 | A-5003-5978 | M3 STY D5SN L21 EWL13.5 d3CF |
| 3 | A-5003-5974 | M3 STY D5R L50 EWL42.5 d3CF |
| 4 | A-5003-4860 | M3 STY D6R L75 EWL75 d4CF |
| 5 | A-5003-4863 | M3 STY D8R L100 EWL100 d4CF |
| 6 | A-5004-7582 | M2-M3 STYLUS TOOL |

www.renishaw.com

# M4 styli kits

## A-5000-7829 M4 stylus kit (TP7M use)

RENISHAW
apply innovation™

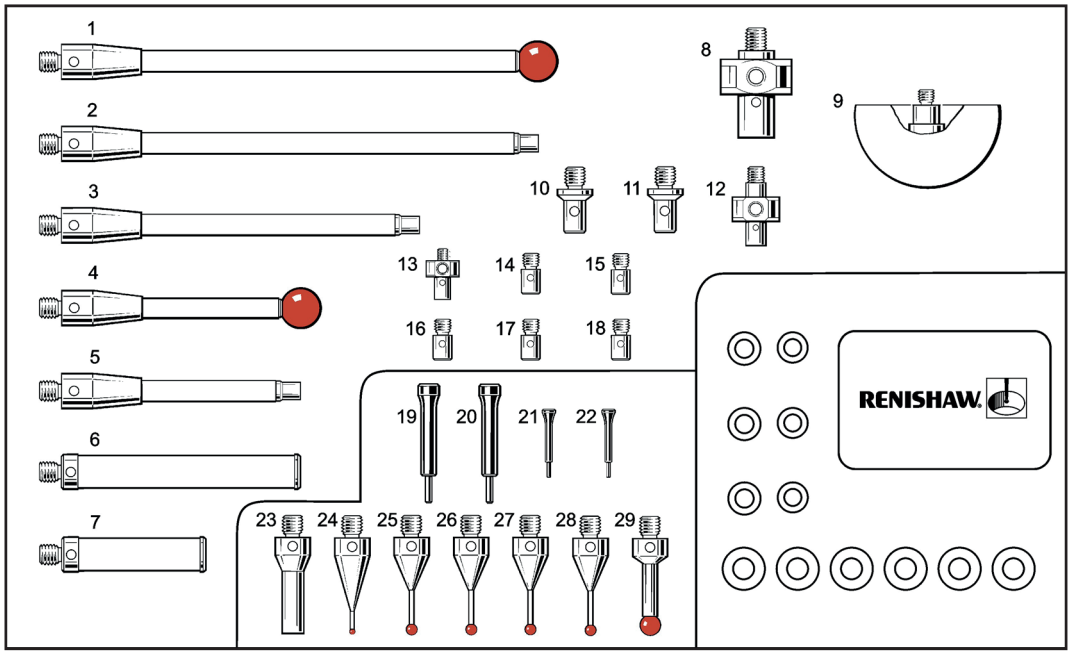



| Position | Part number | Description |
|---|---|---|
| 1 | A-5000-7796 | M4 STY D8R L100 EWL100 d4.5CE |
| 2 | A-5000-7753 | M4-M3 EXT L100CE |
| 3 | A-5000-7752 | M4-M3 EXT L75CE |
| 4 | A-5000-7795 | M4 STY D8R L50 EWL50 d4.5CE |
| 5 | A-5000-7751 | M4-M3 EXT L50CE |
| 6 | A-5000-7755 | M4 EXT L50 d7.4CE |
| 7 | A-5000-7754 | M4 EXT L30 d7.4CE |
| 8 | A-5000-7792 | M4 ACC CENTRE 5WAY |
| 9 | A-5000-7814 | M3 HEM D30CE |
| 10-11 | A-5004-7597 | M4-M3 EXT L9SS |
| 12 | A-5000-7610 | M3 ACC CENTRE 5WAY |
| 13 | A-5000-3627 | M2 ACC CENTRE 5WAY |
| 14-18 | A-5004-7592 | M3-M2 EXT L5SS |
| 19-20 | A-5004-7587 | M4 STYLUS TOOL |
| 21-22 | A-5004-7582 | M2-M3 STYLUS TOOL |
| 23 | A-5004-7596 | M4-M3 EXT L20SS |
| 24 | A-5000-7545 | M4 STY D1R L19.5 EWL4.5 d0.7SS |
| 25-28 | A-5000-7547 | M4 STY D2R L19 EWL9.2 d1.4SS |
| 29 | A-5000-7551 | M4 STY D4R L18 EWL13.7 d3SS |

## M4 styli kits

### A-5004-5132 M4 stylus starter kit

RENISHAW
apply innovation™

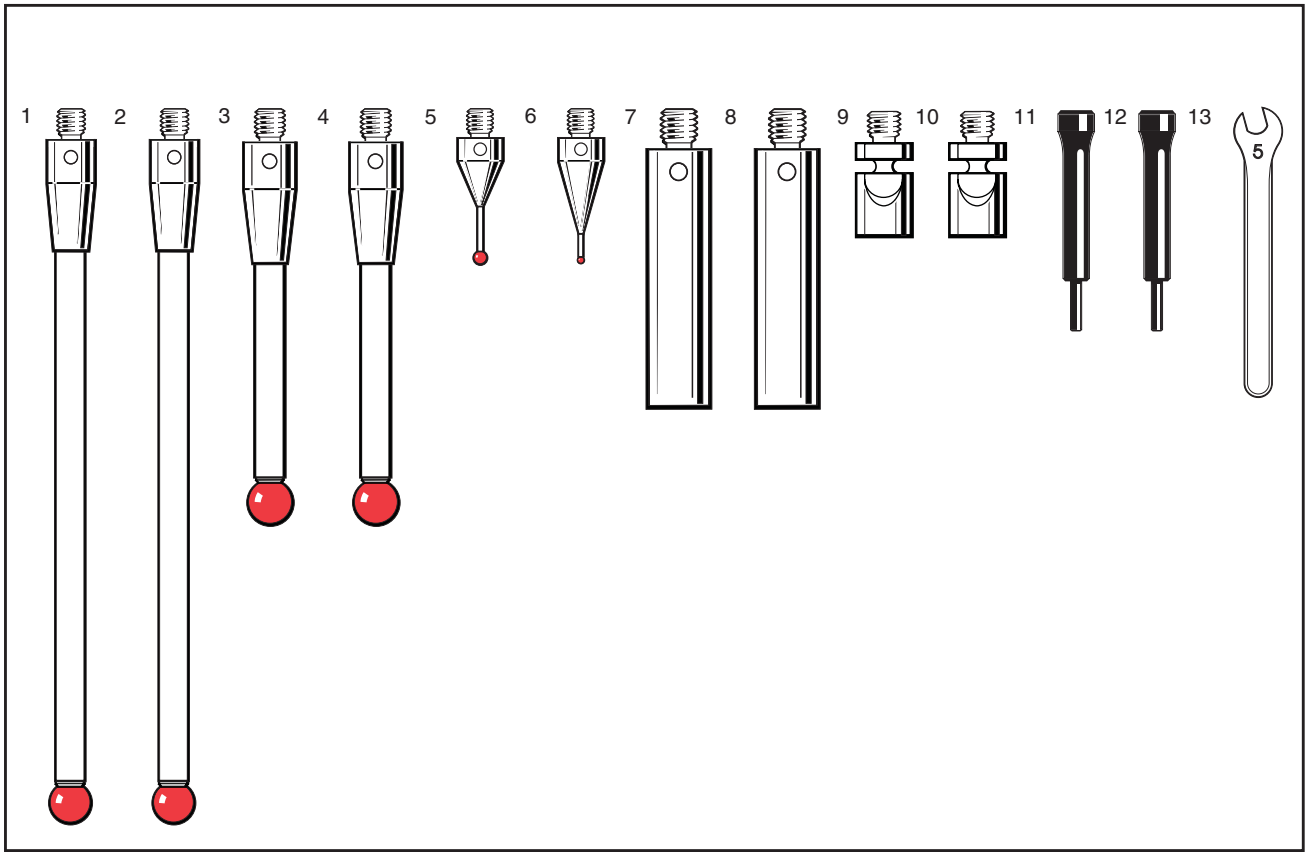



| Position | Part number | Description |
|---|---|---|
| 1-2 | A-5000-3712 | M4 STY D6R L100 EWL88.5 d4.5CE |
| 3-4 | A-5000-3709 | M4 STY D6R L50 EWL38.5 d4.5CE |
| 5 | A-5000-7547 | M4 STY D2R L19 EWL9.2 d1.4SS |
| 6 | A-5000-7545 | M4 STY D1R L19.5 EWL4.5 d0.7SS |
| 7-8 | A-5004-7602 | M4 EXT L30 d7SS |
| 9-10 | A-5004-7621 | M4 CPD L12SLVS |
| 11-12 | A-5004-7587 | M4 STYLUS TOOL |
| 13 | P-TL09-0003 | SPANNER 5 MM A/F |

# M5 styli kits

## A-5003-6168 M5 stylus kit SP80


RENISHAW
apply innovation™

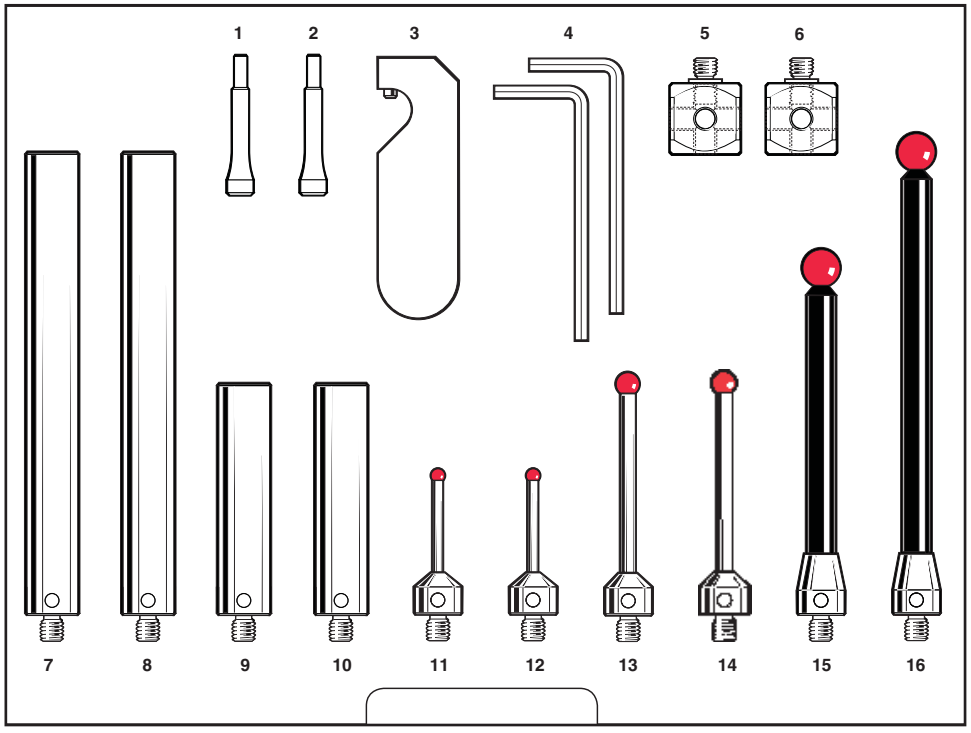


| Position | Part number | Description |
|---|---|---|
| 1-2 | A-5004-7614 | M5 STYLUS TOOL |
| 3 | A-5003-6134 | M5 ACC D11 EXTENSION TOOL |
| 4 | P-TL01-0250 | S3 HEX WRENCH 2.5 MM A/F |
| 5-6 | A-5555-0189 | M5 ACC 15x15 CUBE |
| 7-8 | A-5555-0136 | M5 EXT L100 d11SS |
| 9-10 | A-5555-0670 | M5 EXT L50 d11SS |
| 11-12 | A-5003-5218 | M5 STY D3R L30 EWL21 d2TC |
| 13-14 | A-5003-5236 | M5 STY D5R L50 EWL41 d3TC |
| 15 | A-5003-5251 | M5 STY D8R L75 EWL62 d6CF |
| 16 | A-5003-5262 | M5 STY D8R L100 EWL87 d6CF |

## A-5003-5911 M5 stylus kit – standard


RENISHAW
apply innovation™

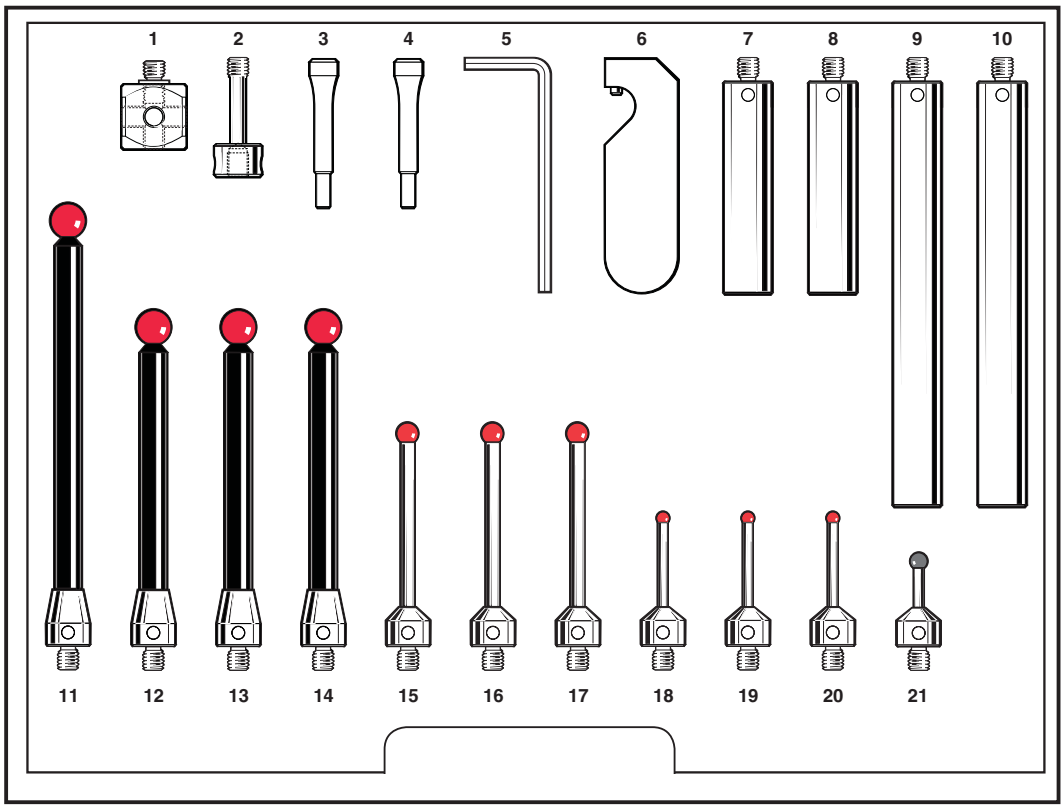


| Position | Part number | Description |
|---|---|---|
| 1 | A-5555-0189 | M5 ACC 15x15 CUBE |
| 2 | A-5003-5677 | M5 ACC CUBE BOLT L28 |
| 3-4 | A-5004-7614 | M5 STYLUS TOOL |
| 5 | P-TL01-0250 | S6 HEX WRENCH 2.5 MM A/F |
| 6 | A-5003-6134 | M5 ACC D11 EXTENSION TOOL |
| 7-8 | A-5555-0670 | M5 EXT L50 d11SS |
| 9-10 | A-5555-0136 | M5 EXT L100 d11SS |
| 11 | A-5003-5262 | M5 STY D8R L100 EWL89.5 d6CF |
| 12-14 | A-5003-5251 | M5 STY D8R L75 EWL64.5 d6CF |
| 15-17 | A-5003-5236 | M5 STY D5R L50 EWL41.5 d3TC |
| 18-20 | A-5003-5218 | M5 STY D3R L30 EWL21 d2TC |
| 21 | A-5003-5733 | M5 STY D4SN L20 EWL11.9 d2TC |

## A-5003-5909 M5 stylus kit – comprehensive


RENISHAW
apply innovation™

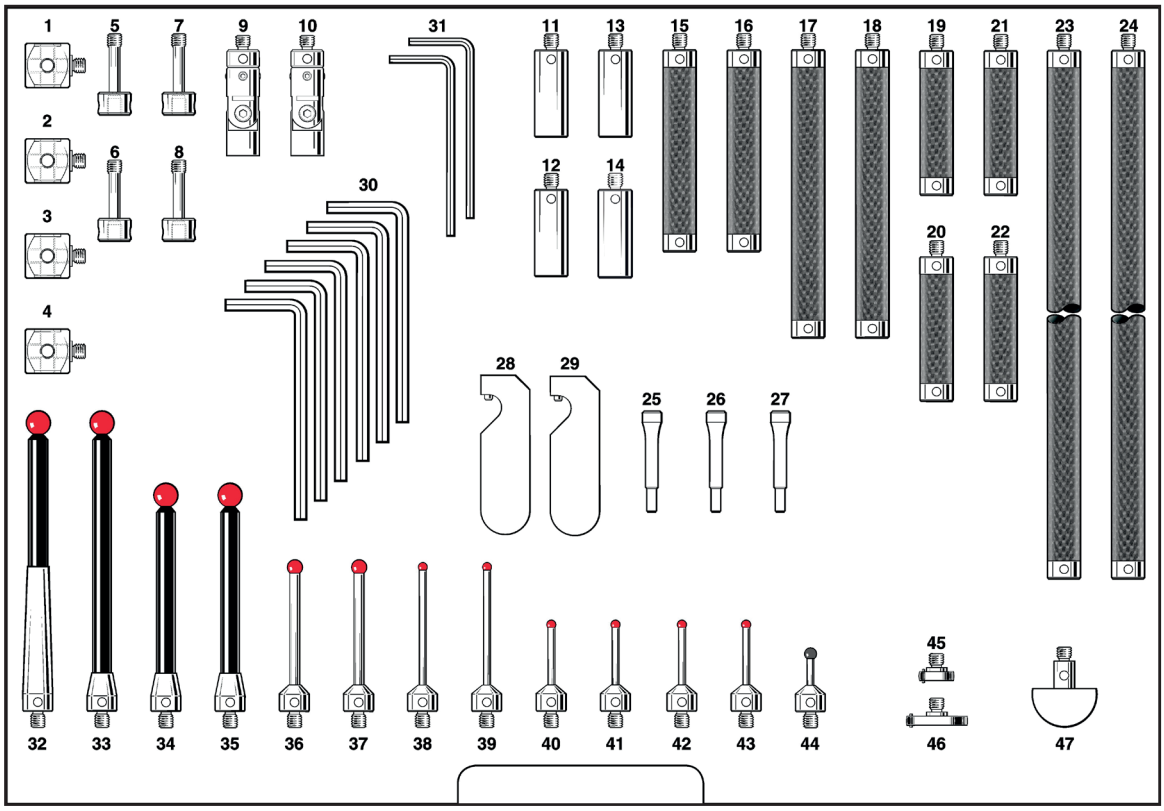


| Position | Part number | Description |
|---|---|---|
| 1-4 | A-5555-0189 | M5 ACC 15x15 CUBE |
| 5-8 | A-5003-5677 | M5 ACC CUBE BOLT L28 |
| 9-10 | A-5003-5278 | M5 ACC KNUCKLE d11 ROTARY |
| 11-14 | A-5555-0669 | M5 EXT L30 d11SS |
| 15-16 | A-5555-0623 | M5 EXT L70 d11CF |
| 17-18 | A-5555-0652 | M5 EXT L100 d11CF |
| 19-22 | A-5555-0648 | M5 EXT L50 d11CF |
| 23-24 | A-5555-0654 | M5 EXT L200 d11CF |
| 25-27 | A-5004-7614 | M5 STYLUS TOOL |
| 28-29 | A-5003-6134 | M5 ACC D11 EXTENSION TOOL |
| 30 | P-TL01-0250 | S3 HEX WRENCH 2.5 MM A/F |
| 31 | P-TL01-0150 | S3 HEX WRENCH 1.5 MM A/F |
| 32 | A-5003-5261 | M5 STY D8R L100 EWL50 d6CF |
| 33 | A-5003-5262 | M5 STY D8R L100 EWL89.5 d6CF |
| 34-35 | A-5003-5251 | M5 STY D8R L75 EWL64.5 d6CF |
| 36-37 | A-5003-5236 | M5 STY D5R L50 EWL41.5 d3TC |
| 38-39 | A-5003-5234 | M5 STY D3R L50 EWL41 d2TC |
| 40-43 | A-5003-5218 | M5 STY D3R L30 EWL21 d2TC |
| 44 | A-5003-5733 | M5 STY D4SN L20 EWL11.9 d2TC |
| 45 | A-5003-5288 | M5 DSC D12SLVS T3 L3 BR-Y5 |
| 46 | A-5003-5289 | M5 DSC D21SLVS T3 L3 BR-Y5 |
| 47 | A-5003-5276 | M5 HEM D22CE d7SS |

## A-5003-5910 M5 stylus kit - general purpose


RENISHAW apply innovation™

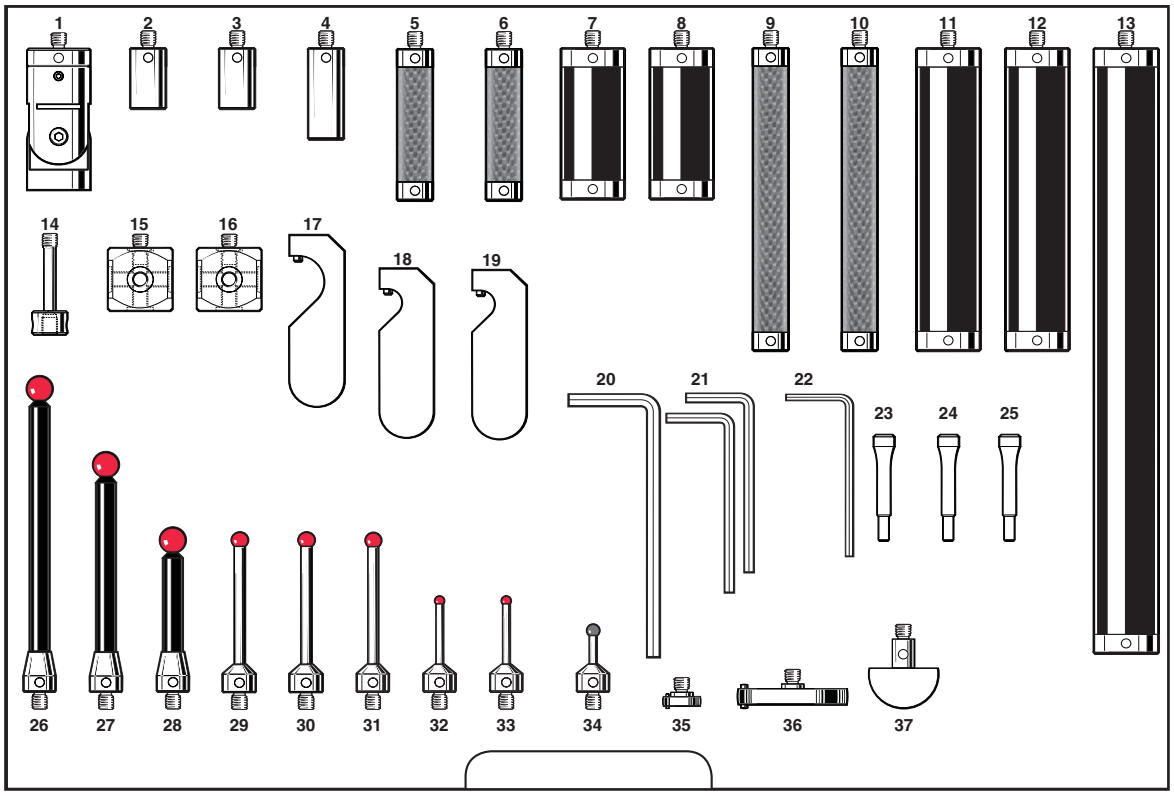


| Position | Part number | Description |
|---|---|---|
| 1 | A-5003-5279 | M5 ACC KNUCKLE d20 ROTARY |
| 2-3 | A-5555-0140 | M5 EXT L20 d11SS |
| 4 | A-5555-0669 | M5 EXT L30 d11SS |
| 5-6 | A-5555-0648 | M5 EXT L50 d11CF |
| 7-8 | A-5555-0671 | M5 EXT L50 d20AL |
| 9-10 | A-5555-0652 | M5 EXT L100 d11CF |
| 11-12 | A-5555-0127 | M5 EXT L100 d20AL |
| 13 | A-5555-0125 | M5 EXT L200 d20AL |
| 14 | A-5003-5676 | M5 ACC CUBE BOLT L33 |
| 15-16 | A-5555-0190 | M5 ACC 20×20 CUBE |
| 17 | A-5003-6135 | M5 ACC D20 EXTENSION TOOL |
| 18-19 | A-5003-6134 | M5 ACC D11 EXTENSION TOOL |
| 20 | P-TL01-0300 | S4 HEX WRENCH 3.0 MM A/F |
| 21 | P-TL01-0250 | S6 HEX WRENCH 2.5 MM A/F |
| 22 | P-TL01-0150 | S3 HEX WRENCH 1.5 MM A/F |
| 23-25 | A-5004-7614 | M5 STYLUS TOOL |
| 26 | A-5003-5262 | M5 STY D8R L100 EWL89.5 d6CF |
| 27 | A-5003-5251 | M5 STY D8R L75 EWL64.2 d6CF |
| 28 | A-5003-5238 | M5 STY D8R L50 EWL39.5 d6CF |
| 29-31 | A-5003-5236 | M5 STY D5R L50 EWL41.5 d3TC |
| 32-33 | A-5003-5218 | M5 STY D3R L30 EWL21 d2TC |
| 34 | A-5003-5733 | M5 STY D4SN L20 EWL11.9 d2TC |
| 35 | A-5003-5288 | M5 DSC D12SLVS T3 L3 BR-Y5 |
| 36 | A-5003-5290 | M5 DSC D35SLVS T5 L4 BR-Y8 |
| 37 | A-5003-5276 | M5 HEM D22CE d7SS |

## A-5003-5912 M5 stylus extension kit – 11 mm


RENISHAW
apply innovation™

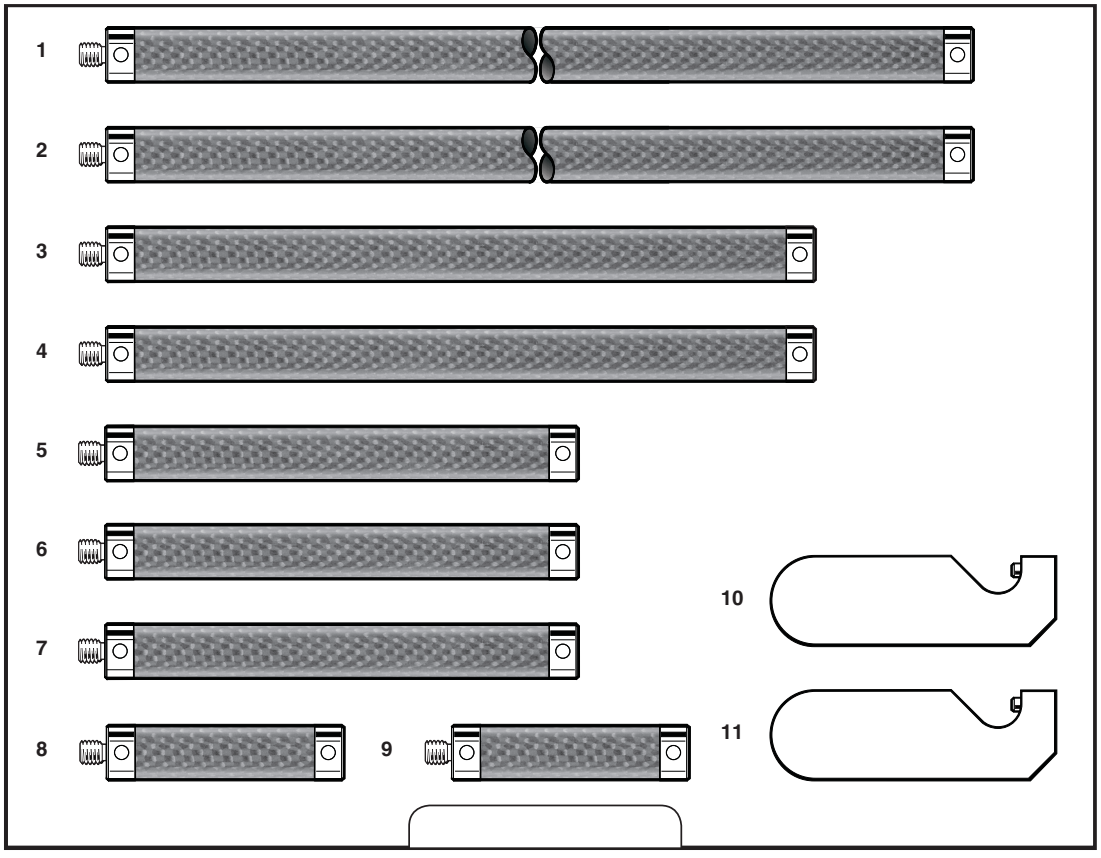


| Position | Part number | Description |
|---|---|---|
| 1-2 | A-5555-0654 | M5 EXT L200 d11CF |
| 3-4 | A-5555-0424 | M5 EXT L150 d11CF |
| 5-7 | A-5555-0652 | M5 EXT L100 d11CF |
| 8-9 | A-5555-0648 | M5 EXT L50 d11CF |
| 10-11 | A-5003-6134 | M5 ACC D11 EXTENSION TOOL |

## A-5003-5913 M5 stylus extension kit - 20 mm


RENISHAW
apply innovation™

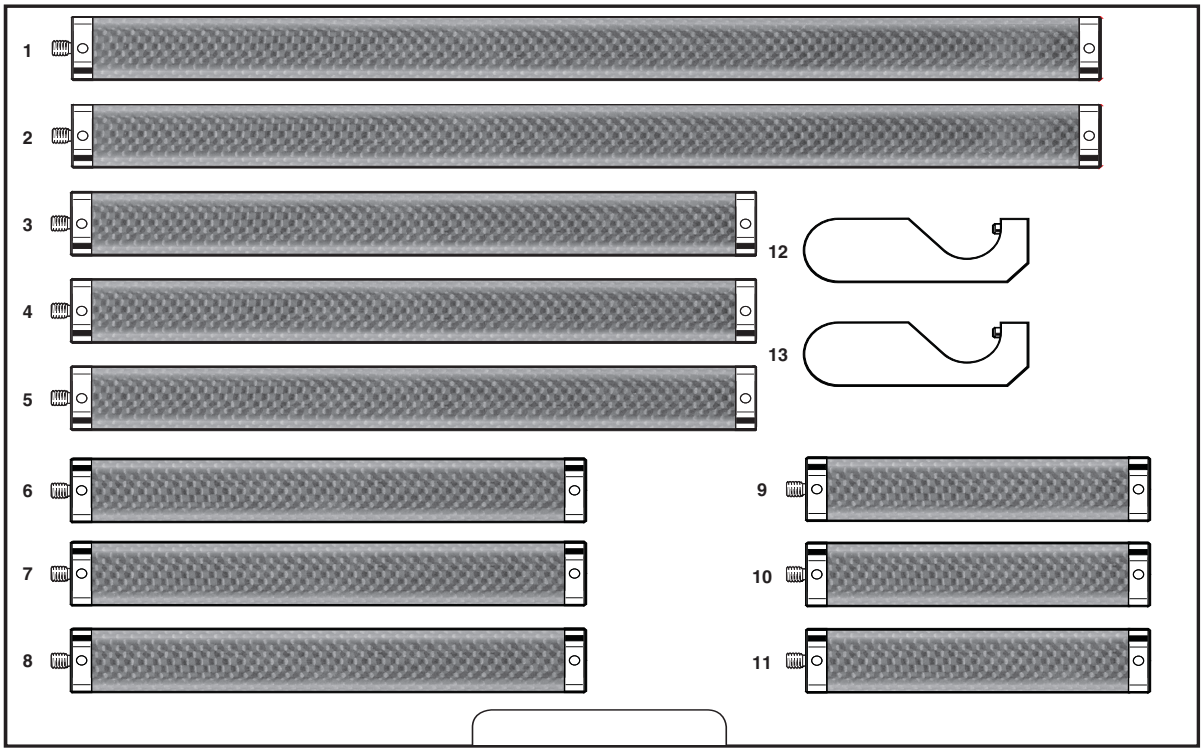


| Position | Part number | Description |
|---|---|---|
| 1-2 | A-5555-0664 | M5 EXT L300 d20CF |
| 3-5 | A-5555-0663 | M5 EXT L200 d20CF |
| 6-8 | A-5555-0661 | M5 EXT L150 d20CF |
| 9-11 | A-5555-0659 | M5 EXT L100 d20CF |
| 12-13 | A-5003-6135 | M5 ACC D20 EXTENSION TOOL |

## A-5504-0281 EQUATOR stylus kit-basic


RENISHAW
apply innovation™

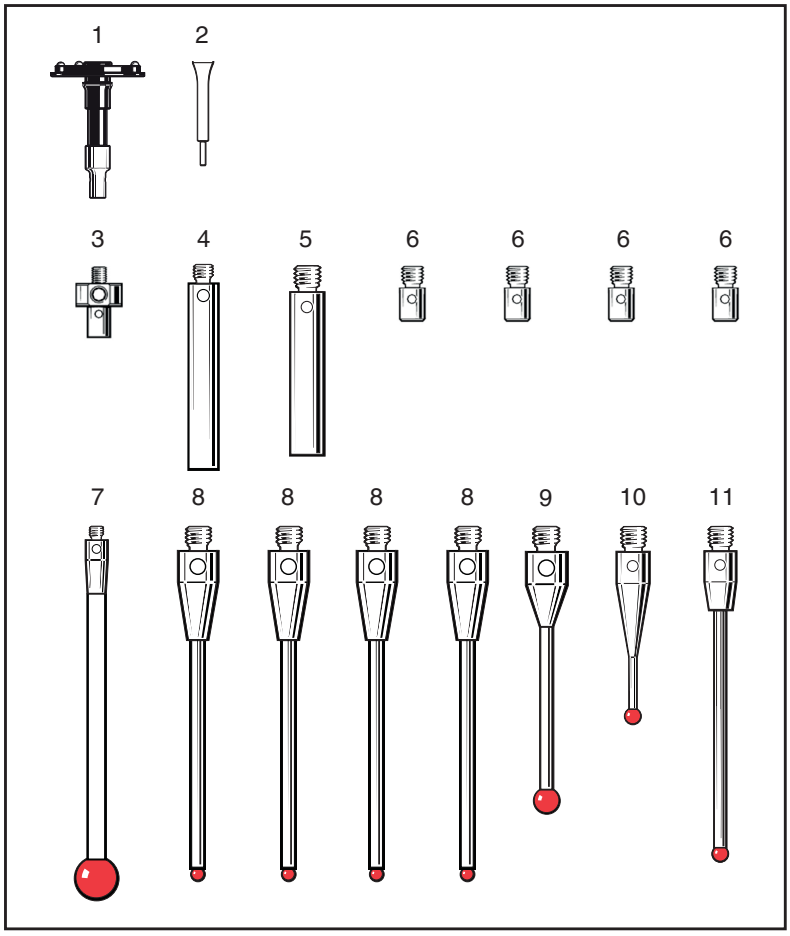


| Position | Part number | Description |
|---|---|---|
| 1 | A-2237-1702 | SH25-2A KIT |
| 2 | A-5004-7582 | STYLUS TOOL D1.13/1.10 |
| 3 | A-5000-3627 | SC2 5-WAY CENTRE |
| 4 | A-5004-7586 | SE5 STYLUS EXTENSION |
| 5 | A-5004-7583 | SE2 STYLUS EXTENSION |
| 6 | A-5004-7592 | SA3 STYLUS ADAPTOR |
| 7 | A-5003-0470 | M2 STYLUS D6R L50 EWL50 d2.5CR |
| 8 | A-5000-8663 | M2 STY D1R L27.5 EWL20.5 d0.7TC |
| 9 | A-5000-3603 | M2 STY D2R EWL13.9 d1.4SS |
| 10 | A-5000-3552 | M3 STY D2R L21 EWL11 d1.4SS |
| 11 | A-5003-0053 | M3 STY D2R L40 EWL32,5 d1,5TC |

## A-5504-0282 EQUATOR stylus kit-intermediate

RENISHAW
apply innovation™

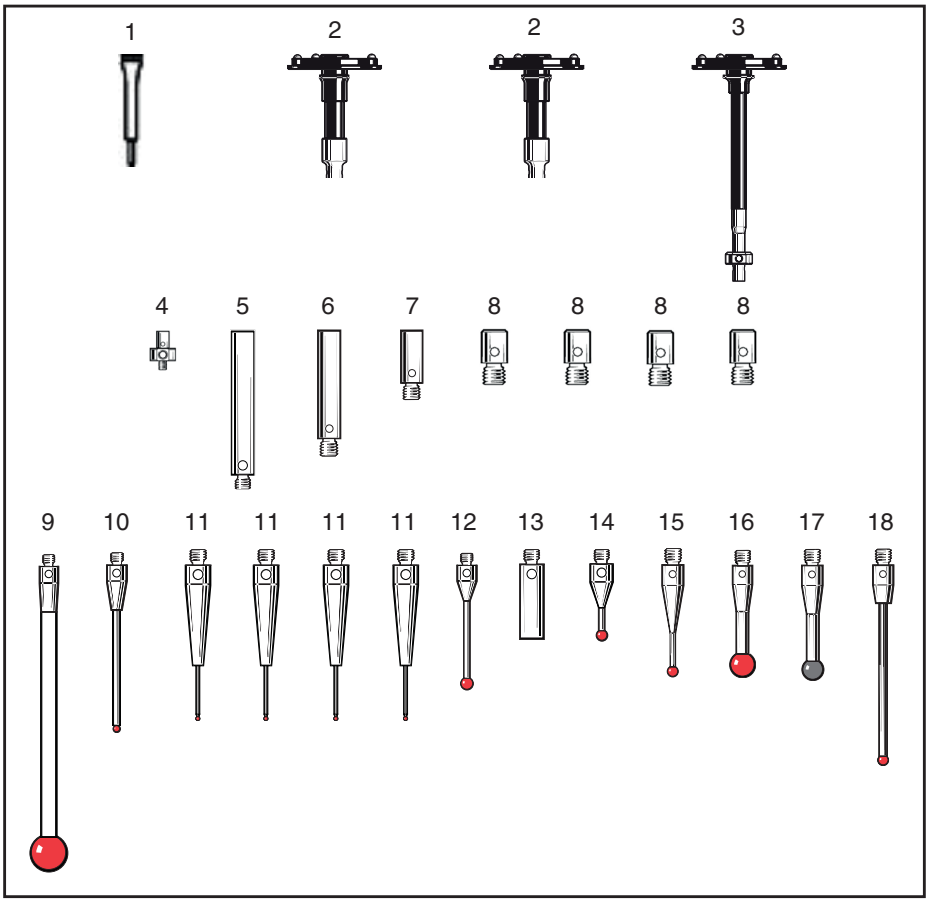



| Position | Part number | SEDescription |
|---|---|---|
| 1 | A-5004-7582 | STYLUS TOOL D1.13/1.10 |
| 2 | A-2237-1702 | SH25-2A KIT |
| 3 | A-5004-5101 | SH25-2 STY L50 5 WAY CNTR |
| 4 | A-5000-3627 | SC2 5-WAY CENTRE |
| 5 | A-5004-7586 | SE5 STYLUS EXTENSION |
| 6 | A-5004-7583 | SE2 STYLUS EXTENSION |
| 7 | A-5004-7609 | SE8 STYLUS EXTENSION |
| 8 | A-5004-7592 | SA3 STYLUS ADAPTOR |
| 9 | A-5003-0470 | M2 STYLUS D6R L50 EWL50 d2.5CR |

| Position | Part number | SEDescription |
|---|---|---|
| 10 | A-5000-8663 | M2 STY D1R L27.5 EWL20.5 d0.7TC |
| 11 | A-5003-1345 | M2 STY D0.5R L20 EWL7 d0.34TC |
| 12 | A-5000-3603 | M2 STY D2R EWL13.9 d1.4SS |
| 13 | A-5004-7585 | SE4 STYLUS EXTENSION |
| 14 | A-5000-7802 | M2 STY D1,5R L10 EWL5,4 d0,7SS |
| 15 | A-5000-3552 | M3 STY D2R L21 EWL11 d1.4SS |
| 16 | A-5000-7630 | M3 STY D5R L21 d2,5SS |
| 17 | A-5003-5061 | M3 STY D4SiN L21 EWL21 D2.5SS |
| 18 | A-5003-0053 | M3 STY D2R L40 EWL32,5 d1,5TC |

## A-5504-0283 EQUATOR stylus kit-advanced

RENISHAW
apply innovation™

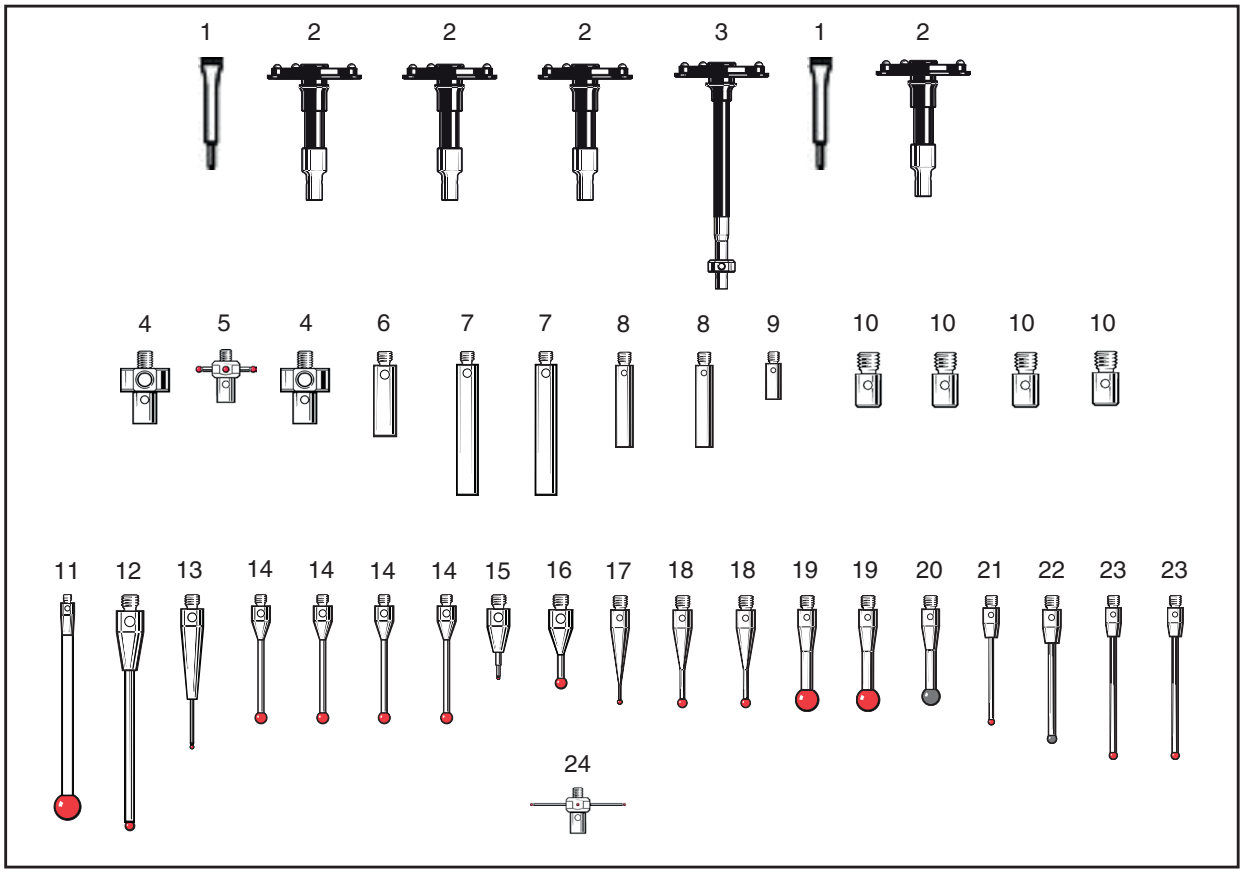



| Position | Part number | Description |
|---|---|---|
| 1 | A-5004-7582 | STYLUS TOOL D1.13/1.10 |
| 2 | A-2237-1702 | SH25-2A KIT |
| 3 | A-5004-5101 | SH25-2 STY L50 5 WAY CNTR |
| 4 | A-5000-3627 | SC2 5-WAY CENTRE |
| 5 | A-5000-7811 | M2 STAR STY 4-WAY D1R L7,5 S10 |
| 6 | A-5004-7585 | SE4 STYLUS EXTENSION |
| 7 | A-5004-7586 | SE5 STYLUS EXTENSION |
| 8 | A-5004-7583 | SE2 STYLUS EXTENSION |
| 9 | A-5004-7609 | SE8 STYLUS EXTENSION |
| 10 | A-5004-7592 | SA3 STYLUS ADAPTOR |
| 11 | A-5003-0470 | M2 STYLUS D6R L50 EWL50 d2.5CR |
| 12 | A-5000-8663 | M2 STY D1R L27.5 EWL20.5 d0.7TC |

| Position | Part number | Description |
|---|---|---|
| 13 | A-5003-1345 | M2 STY D0.5R L20 EWL7 d0.34TC |
| 14 | A-5000-3603 | M2 STY D2R EWL13.9 d1.4SS |
| 15 | A-5000-7800 | M2 STY D0,3R L10 EWL1,8 d0,2TC |
| 16 | A-5000-7802 | M2 STY D1,5R L10 EWL5,4 d0,7SS |
| 17 | A-5000-3551 | M3 STY D1R L21 EWL4 d0.7SS |
| 18 | A-5000-3552 | M3 STY D2R L21 EWL11 d1.4SS |
| 19 | A-5000-7630 | M2 STY D5R L21 d2,5SS |
| 20 | A-5003-5061 | M3 STY D4iN L21 EWL21 D2.5SS |
| 21 | A-5003-0051 | M3 STY D1,5R L30 EWL22,5 d1TC |
| 22 | A-5003-5724 | M3 STY D2SiN L30 EWL22.5 d1.5TC |
| 23 | A-5003-0053 | M3 STY D2R L40 EWL32,5 d1,5TC |
| 24 | A-5003-4787 | M2 STAR STY 4×D0.5 S20 EWL 7 |

## A-5004-7235 Stylus cleaning kit

RENISHAW
apply innovation™

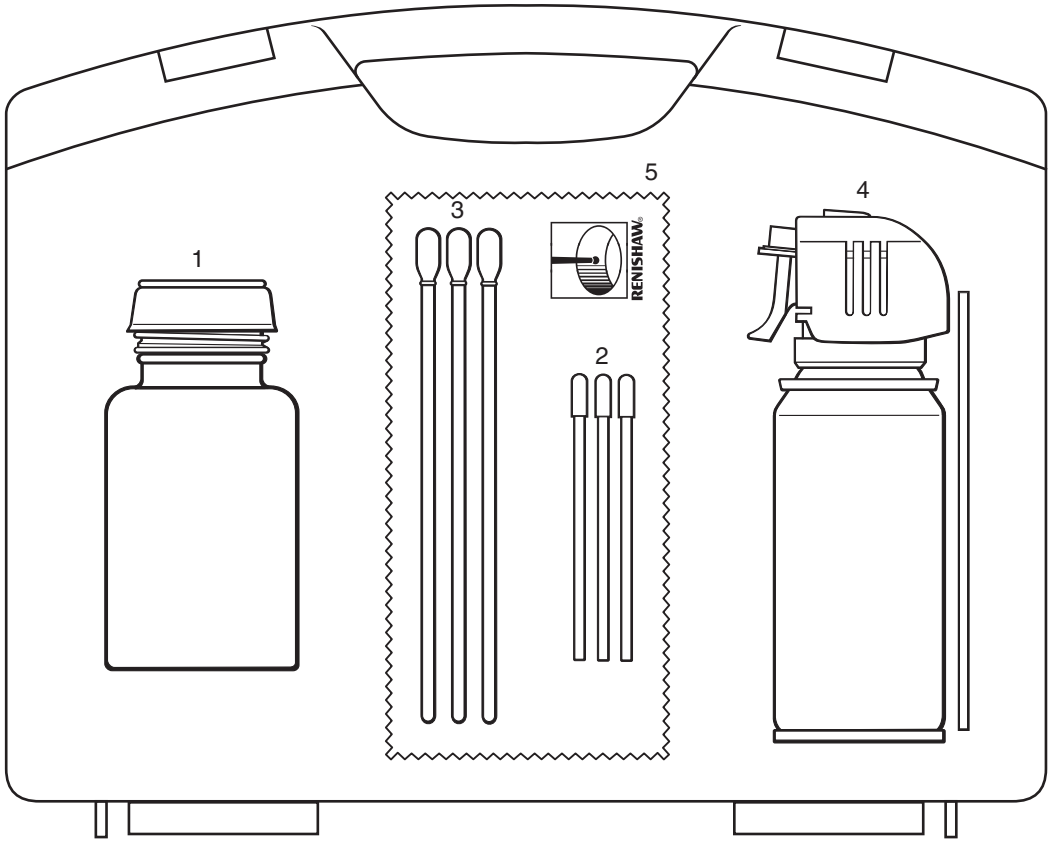



| Position | Part number | Description |
|---|---|---|
| 1 | A-5004-7236 | EMPTY IPA PUMP POT (BLACK) |
| 2 | A-5004-7237 | SMALL LINT FREE BUDS (100 OFF) |
| 3 | A-5004-7238 | LARGE LINT FREE BUDS (100 OFF) |
| 4 | A-5004-7239 | 87 ML AIR DUSTER |
| 5 | A-5004-7240 | CLEANING CLOTH |

## Datum balls

Datum spheres are made from hard-wearing tungsten carbide and come supplied with individual UKAS certificates stating ball diameter and roundness. All sphere measurements are performed on equipment traceable to UK (NPL) standards.

| Datum sphere kit | | Grade 5 (0.13 µm) | Grade 3 (0.08 µm) |
|---|---|---|---|
| Ø12 mm | datum ball | A-1034-0028 | A-1034-0361 |
| Ø19 mm | datum ball | A-1034-0027 | A-1034-0360 |
| Ø25 mm | datum ball | A-1034-0026 | A-1034-0359 |
| Ø¾ in. | datum ball | A-1034-0031 | A-1034-0363 |
| Ø1 in. | datum ball | A-1034-0035 | A-1034-0362 |

**Fixing stud – a fixing stud is required with each kit to attach pillar to table surface.**

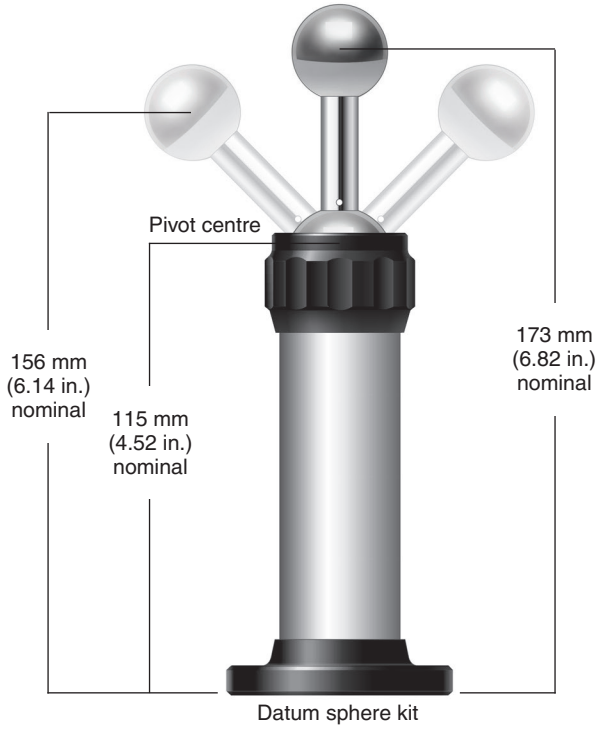


| Fixing stud thread size | Part number |
|---|---|
| M6 × 1 | A-1034-0352 |
| M8 × 1.25 | A-1034-0351 |
| M10 × 1.5 | A-1034-0350 |
| 5/16 - 18 × UNC | A-1034-0354 |
| 3/8 - 16 × UNC | A-1034-0353 |







## Datum balls continued

### Optional extras

| Datum ball | | Grade 5 (0.13 µm) | Grade 3 (0.08 µm) |
|---|---|---|---|
| Ø12 mm | datum ball | A-1034-0005 | A-1034-0538 |
| Ø19 mm | datum ball | A-1034-0023 | A-1034-0595 |
| Ø25 mm | datum ball | A-1034-0002 | A-1034-0596 |
| Ø¾ in. | datum ball | A-1034-0032 | A-1034-0358 |
| Ø1 in. | datum ball | A-1034-0036 | A-1034-0243 |





| Revo datum ball | | Part number |
|---|---|---|
| Ø45 mm | M10F | A-3060-0310 |



**A certified Ceramic ball is used on the Revo datum sphere**


| Accessories | Part number |
|---|---|
| 2 way adaptor | A-1034-0356 |
| 3 way adaptor | A-1034-0357 |
| Pillar extension 75 mm | A-1034-0355 |
| Magnetic base | A-1034-0385 |
| 45° magnetic base | A-1034-0550 |
| Gramme gauge 4 - 30 g | P-GA01-0001 |


2 way


Pillar




Magnetic base

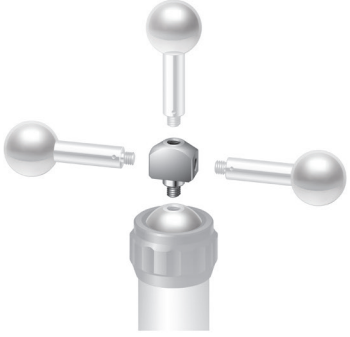
3 way



45° magnetic base

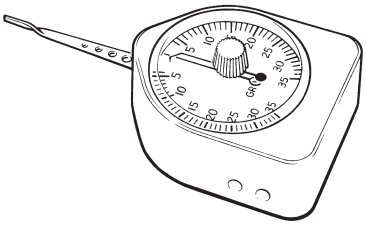
Gramme gauge